


WRAP100

Side loading, modular, compact and flexible case wrap solution, designed for medium capacity.

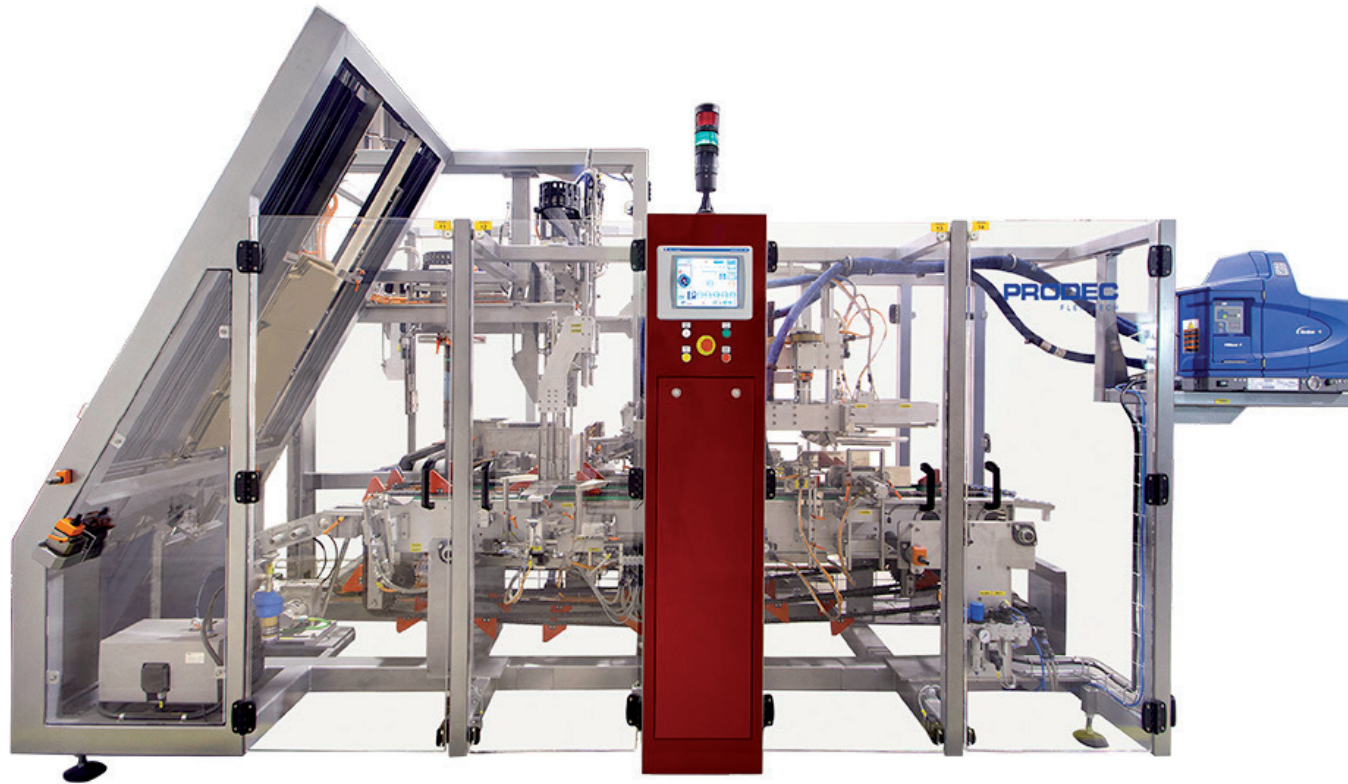

Wraparound packing type unit for intermittent operation.

The **Wrap 100** packer has 3 stations, for separating the shape of the case, for the introduction of additional products, shaping of the case, prior to product introduction.

This model incorporates servomotors to ensure optimization of the movements and maximize speed. Suitable for production of up to 22 cases/minute, this model is distinguished both by the ease of formatting changes, its accessibility to all mechanisms and easy maintenance.

Due to a flexible and modern design, the Wrap 100 exhibitors can make the top packaging such as protective tray caps and cases fully surround the product inside.

A wide range of items and accessories are available to order, stack and fit different types of packaging, adapting each of them according to their characteristics and required production.

Characteristics

- > Compact and ergonomic design.
- > Easy access and cleaning of all parts.
- > Machine driven by servo motor.
- > Modular structure is composed of a grouped unit to create the grouping device and to form a case unit for product filling, sealing and bonding.
- > Various types of presentation of cases available, depending on product size, shape, speed, and configuration of the case (case wrap, tray, tray and lid...).
- > Optional high-capacity storage and a range of up to 500 sheets of cardboard.
- > Optional automatic transmission format.
- > PackML standard programming.
- > Forming and closing perfectly square cases.
- > Height of case store for ergonomic working criteria.
- > Motorized arm equipped with suction cups to ensure the removal of the plate from stock.
- > Positively guided product and cases.

PRODEC
FLEX · TECH

WRAP100

Side loading, modular, compact and flexible case wrap solution, designed for medium capacity.

The frame has been designed to be as compact and robust as possible with polycarbonate doors which offer a complete visual inspection from any view around the machine. The doors allow free and unhindered access inside the machine, including safety switches, in case of opening. The work cycle of the cases takes place in a single layer. This is an important factor, since the product is handled without drops or falls.

The closed system is executed by Hot Melt, with automatic adjustment of dose and length of lines through the touch screen. The storage material has a capacity of approximately 160 sheets. It has a minimum level cargo detector which signals by an audio or visual warning. Adjusting the size of the sheet is achieved using a crank with digital displays. Optionally, you can provide greater capacity.

Touchscreen

The touch screen and PLC are scheduled as per the standard modular OMAC and PACK ML architecture. The equipment is controlled through a multi purpose touch screen, providing the operator with the information necessary for proper handling, operations, format change and adjustment. Also, through different levels of password protection on the screen, you can modify the main parameters of the equipment. The glue tail and its length can be adjusted through the touch device to ensure the correct closure of the case and minimize the consumption of hot melt.

PRODEC has brought together a team for developing these outstanding design features and functionality detailed below:

Compact design

All the functions described are developed in a unique monoblock, occupying a small and simple handling space for the operator. Robust and transparent from any constructive conception angle, it allows one to observe all mechanisms and operational functionality from the outside.

Accessible


The clean, open design without mechanical barriers, greatly simplifies all interventions required on the equipment, whether by a change in format or a simple cleaning and maintenance regulation or routine.

Flexible

Its advanced concept allows an expansion of its functions to suit the required project needs.

Technical information

Production	22 cases/min				
Programming interface	OMAC (Pack ML)				
Store length	500m/m				
Color	Metallic gray				
Case measurements	L	B	H Tray	H Case	
	Min.	150	70	70	130
	Max.	500	350	300	300

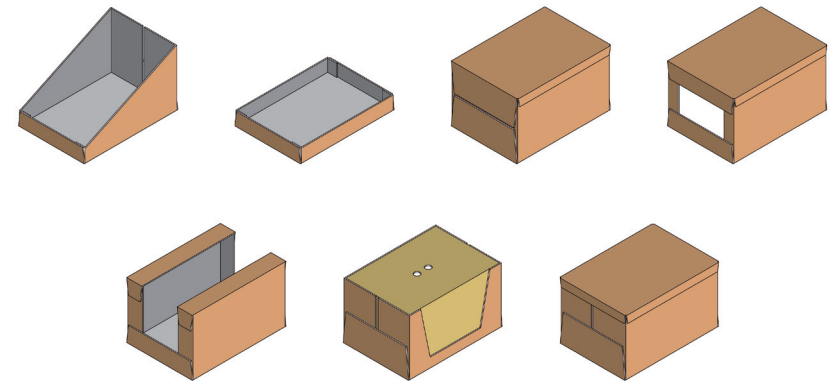

Ergonomics

We have used specific design methods for its development to optimize the comfort and convenience of staff working on the machine.

Information Management

A powerful software developed by our technical team allows you total control over the device functions. You can also perform simple formatting changes through the incorporated touch screen. Through this, it is possible to verify production efficiency for shifts or slots, making it an effective analytical instrument. It is ready to integrate various lines of work according to the standard OMAC.